


TOOLS SEAT WRENCHES

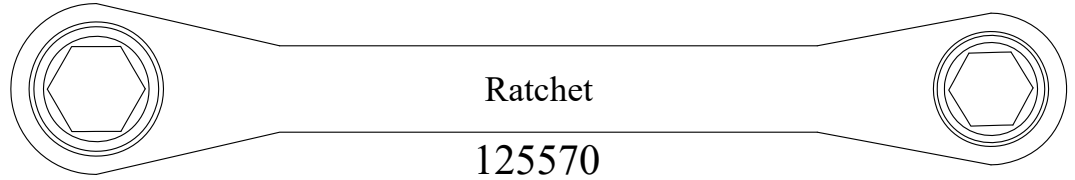

Ratchet

125570

THESE TOOLS ARE ALL HARDENED & COATED WITH BLACK OXIDE WITH THE EXCEPTION OF THE RATCHET

Available Wrench Kits

125500 - Kit Includes:
Packaging Tube with
Hex Wrench
Small Square Wrench
Large Square Wrench
and Ratchet Wrench


132850 - Kit Includes:
All items from 125500
+ Easy-Out Wrench

132920 - Kit Includes:
All items from 125500
+ Squex Wrench

132990 - Kit Includes:
All items from 125500
+ Easy-Out Wrench
and Squex Wrench


Packaging Tube

127040




Hex Wrench

121580




Small Square Wrench

121510




Large Square Wrench

121440




Easy-Out Wrench

134790



Squex Wrench

121650




Mobile Home Wrench

192790


TOOLS SEAT WRENCHES

THESE TOOLS ARE ALL HARDENED & COATED WITH BLACK OXIDE




Small Square Wrench

116450




Small Hex Wrench

116730

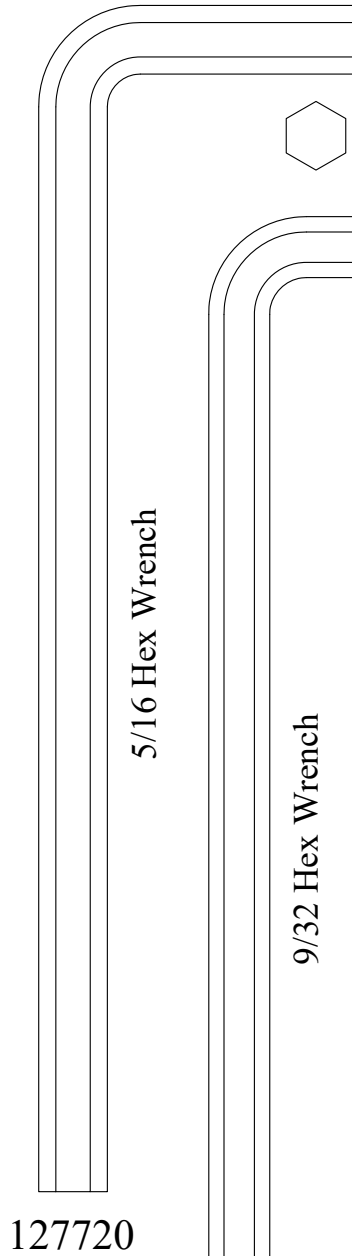

5/16 Hex Wrench

127720

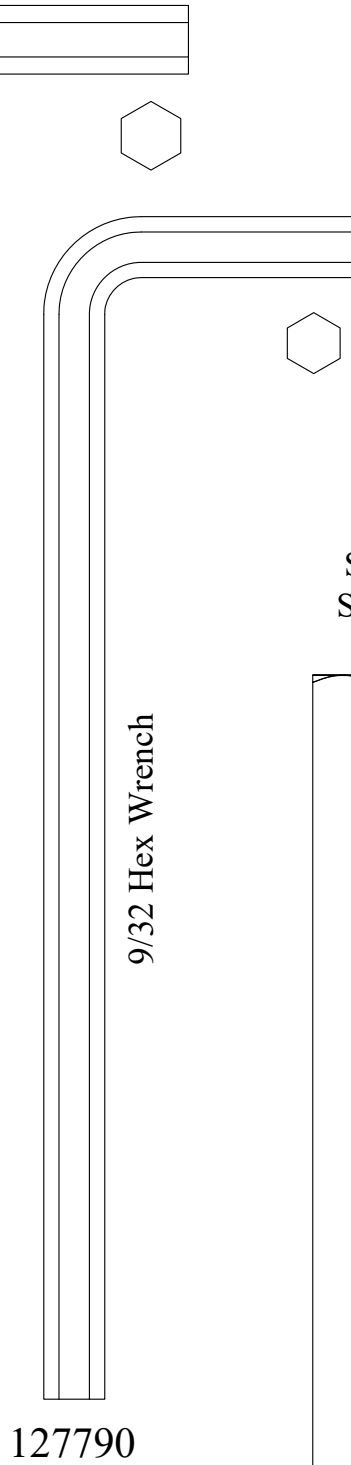


9/32 Hex Wrench

127790



Symmons Hot Seat Wrench

123220



Symmons Hot Cold Wrench

123240

Available Wrench Kits

123150 - Kit Includes:
Symmons Hot Seat Wrench
Symmons Cold Seat Wrench

TOOLS

THE PREMIERE MOEN™ CARTRIDGE EXTRACTOR

ONA PULLER



CHECK OUT OUR VIDEO




FOR EXTRACTING MOEN VALVE CARTRIDGES



MADE IN THE USA



1. Turn off water supply. Follow instructions with new Moen cartridge.
2. Insert the LONG THREADED ROD through the Posi-Temp PULLER TUBE, threading it into the old cartridge stem.
3. Center the PULLER TUBE over the cartridge and hold firmly in line.
4. Thread the HANDLE on to the LONG THREADED ROD and turn. This will draw the old cartridge into the PULLER TUBE.




Labels: Puller Tube For Posi-Temp, Handle, Old Cartridge, Long Threaded Rod

See instructional video at barrYWalter.com or QR code on the front

1. Turn off water supply. Follow instructions with new Moen cartridge.
2. Insert the LONG THREADED ROD through the PULLER TUBE, threading it into the old cartridge stem.
3. Center the PULLER TUBE over the cartridge and hold firmly in line.
4. Thread the HANDLE on to the LONG THREADED ROD and turn. This will draw the old cartridge into the PULLER TUBE.

If the cartridge pulls out but the cartridge sleeve remains:

1. Remove the PULLER TUBE and LONG THREADED ROD from the HANDLE.
2. Assemble the TAPERED BOLT through the EXPANDER on the HANDLE and thread the CROSS PIN onto the TAPERED BOLT.
3. Insert the EXPANDER into the cartridge sleeve until it bottoms out and tighten the TAPERED BOLT with the CROSS PIN until the EXPANDER will not turn in the cartridge sleeve.
4. Work the HANDLE back and forth to break the cartridge sleeve loose, pulling on the CROSS PIN with your other hand to remove the sleeve.

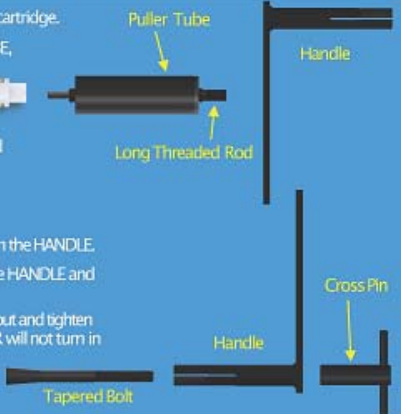

Labels: Puller Tube, Handle, Old Cartridge, Long Threaded Rod, Cross Pin, Tapered Bolt



SCAN TO WATCH THE ONA PULLER TUTORIAL VIDEO

EXTRACT ANY
1200, 1220 OR 1225
VALVE CARTRIDGE
WITH EASE

PART # 999150-ALL

ONA tool comes packaged in a hanging clamshell with display card and instructions. Small drawstring bag included to hold tools for safe storage.

TOOLS

FOR VOLA



Thermostatic Hex Key


153600

FOR VOLA



18mm Hex Key

154970




FOR SLOAN and TOTO



3/4" Square
161370

Tailpiece Nipple Wrench



FOR SLOAN



141810

Tailpiece Nipple Wrench


FOR KOHLER





Niedecken Bushing Wrench

150170
OEM # 22117-A

TOOLS

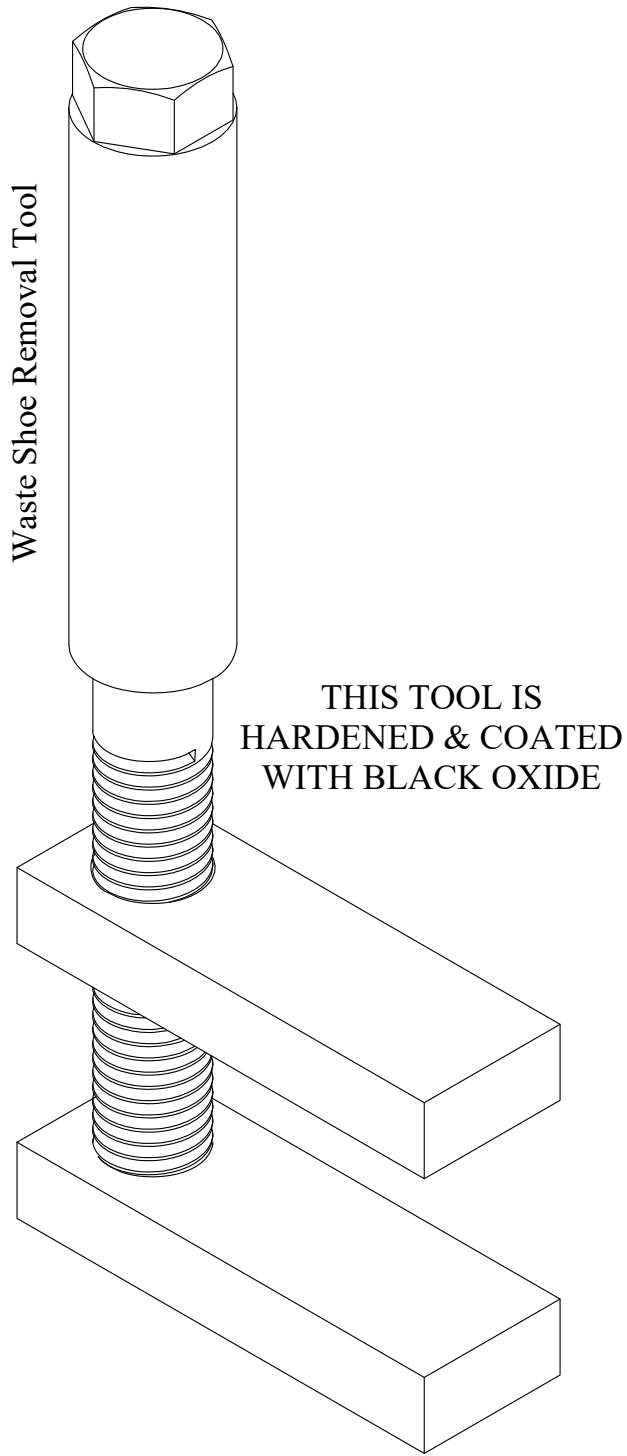

120670

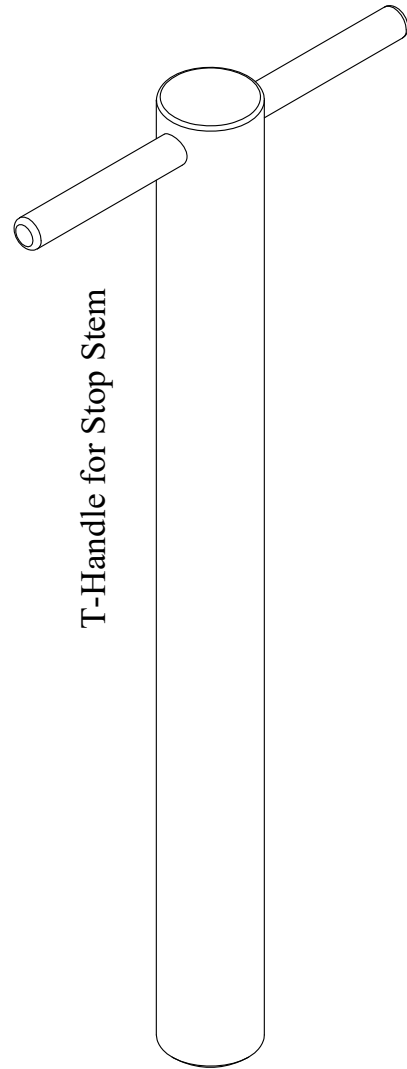

18
3-3

999010