

TOOLS SEAT WRENCHES

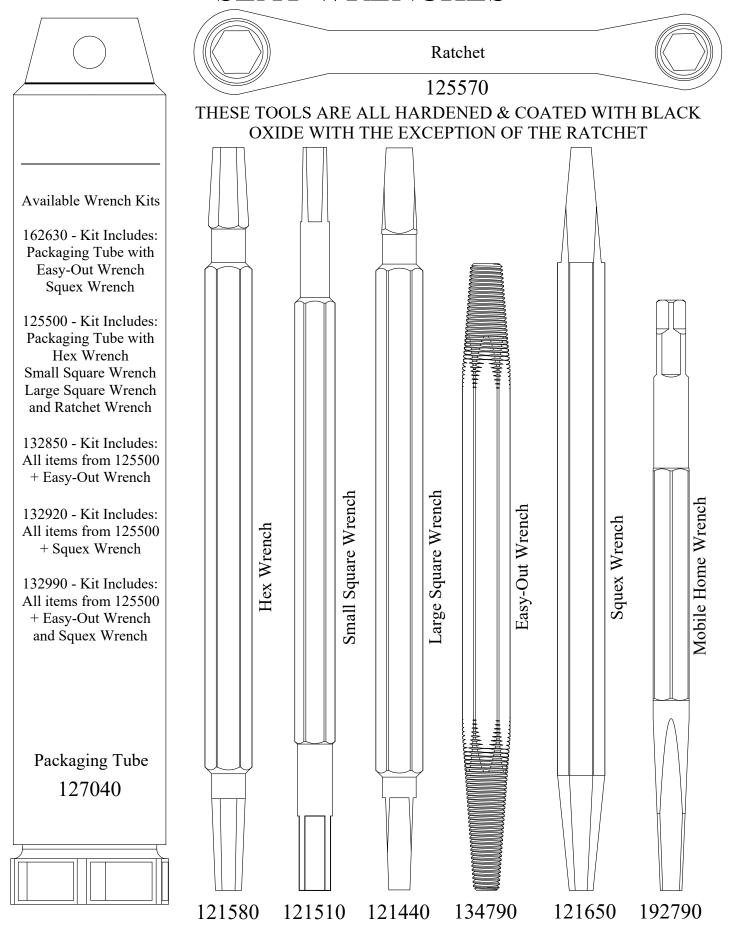


TOOLS SEAT WRENCHES


THESE TOOLS ARE ALL HARDENED & COATED WITH BLACK OXIDE

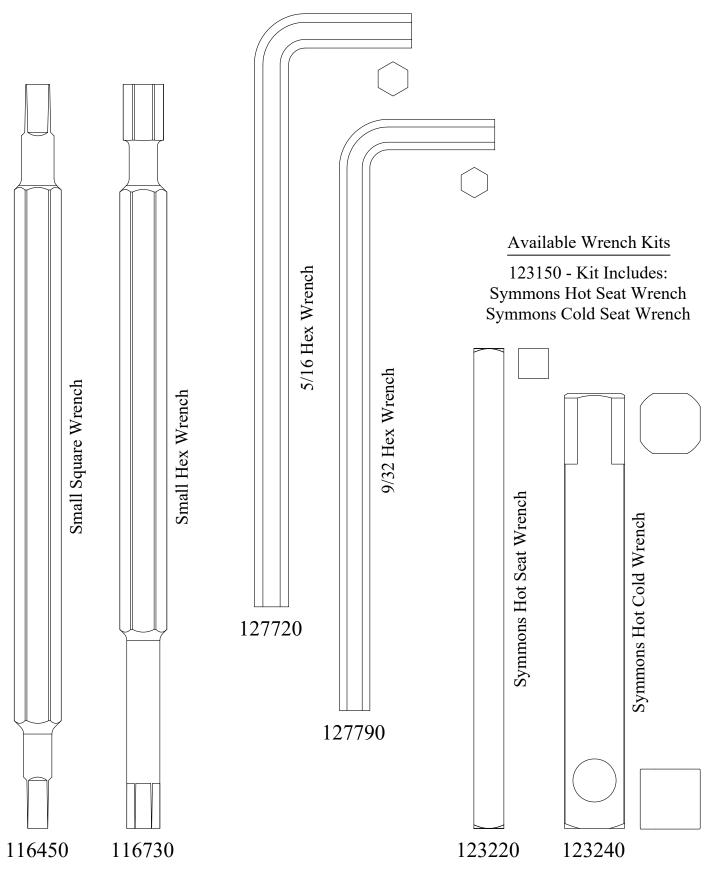

THE PREMIERE MOEN™ CARTRIDGE EXTRACTOR

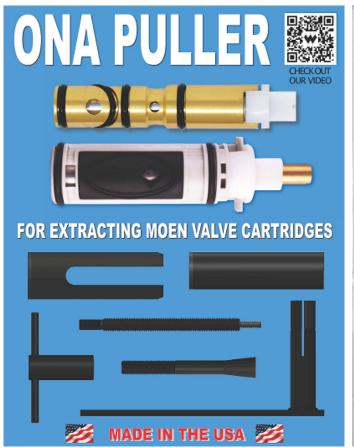



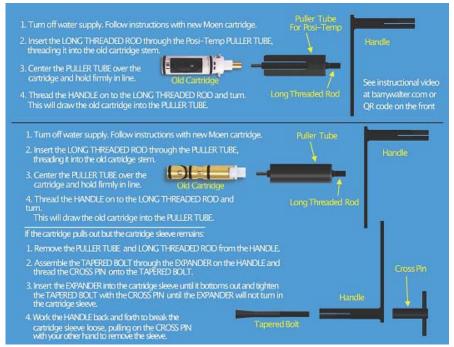



SCAN TO WATCH THE ONA PULLER TUTORIAL VIDEO

> EXTRACT ANY 1200, 1220 OR 1225 VALVE CARTRIDGE WITH EASE

PART # 999150-ALL

ONA tool comes packaged in a hanging clamshell with display card and instructions. Small drawstring bag included to hold tools for safe storage.

STAND ALONE ONA PULLER KIT FOR REMOVAL OF A BROKEN POSI-TEMP CARTRIDGE





FOR USE WITH 999150-ALL ONA PULLER KIT TO REMOVE A BROKEN POSI-TEMP CARTRIDGE



THE PREMIERE MOEN™ CARTRIDGE EXTRACTOR







USE WITH 999150-ALL TO EXTRACT DELTA MULTI-CHOICE 13/14 SERIES CARTRIDGES

PART # 999150-7

Handle

- 1. Turn off water supply. Follow instructions with new Delta cartridge.
- 2. After removing the trim, remove the bonnet/locking nut from the valve body.
- Insert the LONG THREADED ROD through the DELTA ONA TUBE, threading it into the Delta cartridge.







- Thread the HANDLE on to the LONG THREADED ROD and turn. This will draw the old cartridge into the DELTA ONA TUBE removing it from the valve body.
- Re-assemble the faucet in the reverse order you started.



FOR VOLA 1249.40 18mm Hex Key

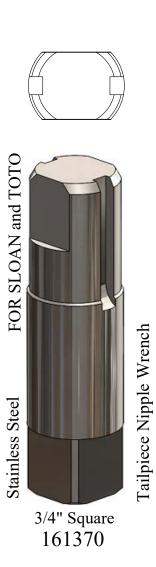

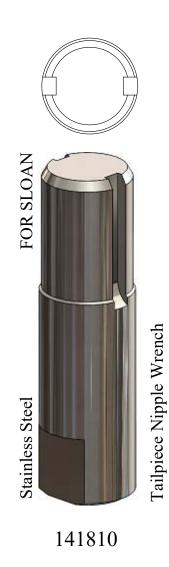




150170 OEM # 22117-A

Niedecken Bushing Wrench

UNIVERSAL AERATOR KEY

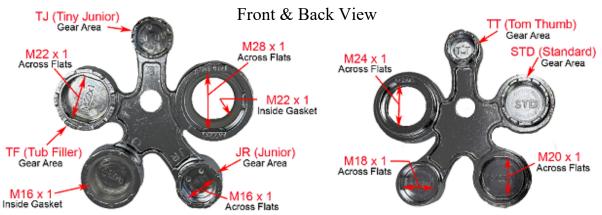

AK13

13 Aerator sizes in 1 Tool. Works on almost all standardized aerators on the market



TF (Tub Filler)
TJ (Tiny Junior)
TT (Tom Thumb)
JR (Junior)
STD (Standard)

M28 x 1 M24 x 1 M22 x 1 M20 x 1 M18 x 1 M16 x 1

HYDRANT KEY

999030



999040





3/4" Square SV94547

AS94587

